



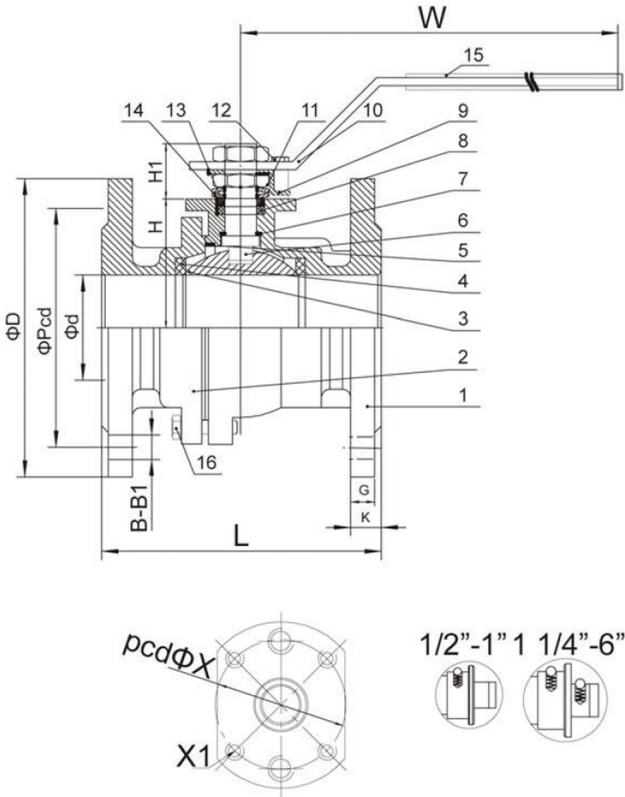

S.NO.	COMPONENT	QTY	MATERIAL
1	BODY	1	CF8/CF8M
2	CAP	1	CF8/CF8M
3	BALL	1	CF8/CF8M
4	BALL SEAT	2	RPTFE
5	JOINT GASKET	1	PTFE
6	STEM	1	304/316
7	THRUST WASHER	1	PTFE
8	STEM PACKING	1	PTFE
9	STOPPER	1	304
10	HANDLE	1	304
11	NUT	2	304
12-1	BOLT	1	304
12-2	PIN	1	304
13	STEM RING	1	304
14	BELLEVILLE WASHER	2	304
15	HANDLE SLEEVE	1	PVC
16	BOLT	4-8	304

- ANSI CLASS 150
- Sizes available from 1/2" up to 6"
- Full Port
- End Flange: ASME B16.5
- Investment casting
- Blow-out proof stem
- Inspection Testing: API 598
- 1/4 turn lockable handle
- PED97/23/PE (CE0035) Approved
- Design: ASME B16.34

PRESSURE TEMPERATURE RATINGS

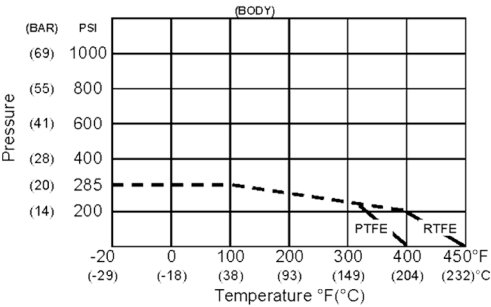

CLASS 150 LB														
SIZE	PRODUCT CODE	Ød	G	K	D	B	B1	L	H	H1	W	X	X1	KG EACH
1/2	FLBV15008	15	8.2	10.7	88	10.2	4	108	26.5	16.45	130	42	M5	1.80
3/4	FLBV15012	20	9.5	12	97	16.2	4	117.1	30.1	17.2	130	42	M5	2.50
1	FLBV15016	25	10.5	13	107	16.2	4	127	35.25	23.3	160	50	M6	4.00
1-1/4	FLBV15020	32	11.5	14	115	16.2	4	140	40.8	23.3	160	50	M6	5.70
1-1/2	FLBV15024	38	12.5	16	125	16.2	4	166	48	30.2	200	70	M8	7.50
2	FLBV15032	50	14	17.5	150.5	19.3	4	178	56.5	30.2	200	70	M8	10.60
2-1/2	FLBV15040	65	16.8	20.3	176	19.3	4	190	74.5	29.7	220	70	M8	13.50
3	FLBV15048	80	17.5	21	188.5	19.3	4	203	86	39.6	260	102	M10	19.80
4	FLBV15064	100	17.7	21	227	19.3	8	229	107.75	38.1	260	102	M10	26.00
6	FLBV15096	150	21	24	277	22	8	394	152.75	-	-	125	M12	61.50

** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL **