

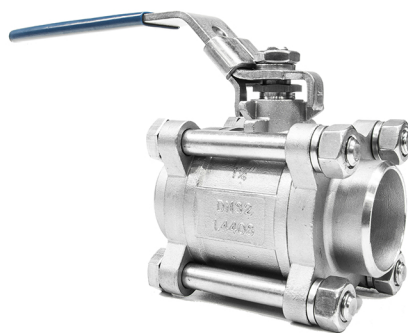


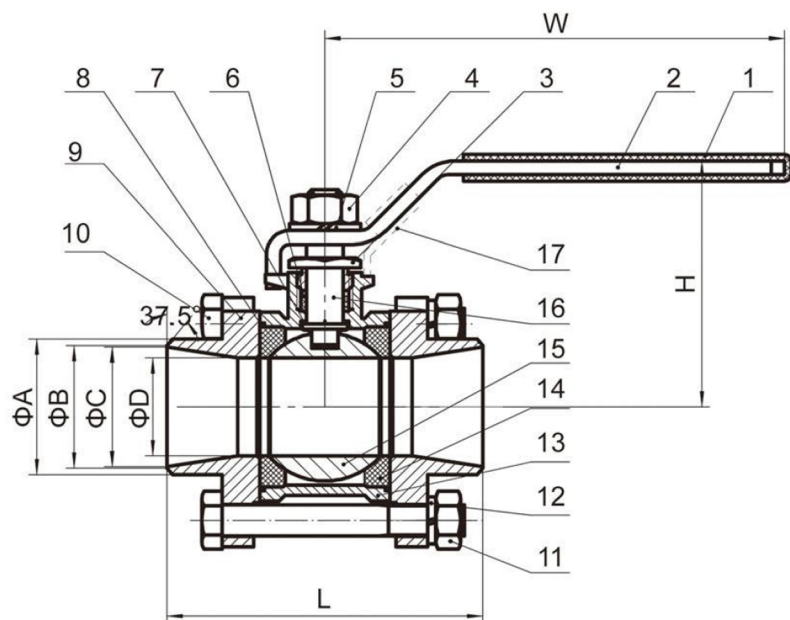

S.NO.	COMPONENT	QTY	MATERIAL
1	HANDLE SLEEVE	1	PVC
2	HANDLE	1	304
3	GLAND NUT	1	304
4	STEM NUT	1	304
5	SPRING WASHER	1	304
6	STEM PACKING	1	PTFE
7	THRUST WASHER	1	PTFE
8	JOINT GASKET	2	PTFE
9	CAP	2	CF8/CF8M
10	BOLT	4(6)	304
11	BOLT NUT	4(6)	304
12	SPRING WASHER	4(6)	304
13	BODY	1	CF8/CF8M
14	BALL SEAT	2	RPTFE
15	BALL	1	CF8/CF8M
16	STEM	1	304/316
17	LOCKING DEVICE	1	304

- Pressure rated at 1000 PSI (WOG) - 1/4" --> 2"
- Pressure rated at 800 PSI (WOG) - 2-1/2" --> 4"
- Sizes available from 1/4" up to 4"
- 3-Piece Full Bore / Port
- Butt Weld Ends: ASME B16.25 (SCH.40)
- Investment casting Body & Cap
- Blow-out proof stem
- Inspection Testing: API 598, / EN12266
- 1/4 turn lockable handle
- PED97/23/PE (CE0035) Approved



SIZE	PRODUCT CODE BUTT WELD	ØA	ØB	ØC	ØD	L	H	W	CV FACTOR	KG EACH
1/4	FBVX04BW	18	14.5	10.8	10.8	60.4	48	103	6	0.44
3/8	FBVX06BW	19.5	15.9	11	11	60.4	48	103	7	0.52
1/2	FBVX08BW	23	19.2	15	15	66.5	52	103	10	0.67
3/4	FBVX12BW	28.8	23.4	21	20	80	61	123	25	0.88
1	FBVX16BW	34.8	28.6	26.7	25	84	65	123	35	1.26
1-1/4	FBVX20BW	45	38	34	32	104	79	153	46	2.05
1-1/2	FBVX24BW	51	44	40.5	38	112	83	153	80	2.80
2	FBVX32BW	62.5	56.5	52.5	50	132	97	185	110	4.35
2-1/2	FBVX40BW	77	68	65	64	160.2	135	243	310	8.58
3	FBVX48BW	94	86	80.5	76	182.2	144	243	360	14.50
4	FBVX64BW	116	105	98	94	226.8	172	315	820	26.50

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****