


KFB12-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with flange, sealed, greased, with relubrication facility; corrosion-resistant design possible

Technical information

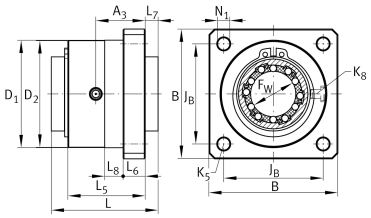

Your current product variant

Size code	12
Seal	PP
Relubrication	AS

Technical data

	5	Ball rows
≈m	0,08 kg	Weight

Main Dimensions & Performance Data

F_W	12 mm	Diameter of ball complement
Tol F_W	+ 0,008 mm	Upper tolerance
L	32 mm	Length
B	40 mm	Width
C	540 N	Load capacity dyn. C
C_0	385 N	Load capacity stat. C0

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website

Mounting dimensions

L_5	22 mm	
L_6	6 mm	Thickness
L_7	4,2 mm	
A_3	11,5 mm	
N_1	5,5 mm	Diameter
K_5	M5	
D_1	31,5 mm	Diameter
Tol D_1	+ 0,2 mm	Upper tolerance
D_2	32 mm	Diameter
Tol D_2	g7	Upper tolerance
J_B	30 mm	
L_8	10 mm	
K_8	NIPD3	Lubrication nipple

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website