


KFB16-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with flange, sealed, greased, with relubrication facility; corrosion-resistant design possible

Technical information

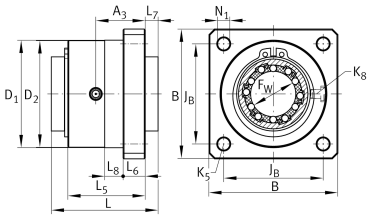

Your current product variant

Size code	16
Seal	PP
Relubrication	AS

Technical data

	5	Ball rows
≈m	0,12 kg	Weight

Main Dimensions & Performance Data

F_W	16 mm	Diameter of ball complement
Tol F_W	+ 0,009 mm	Upper tolerance
Tol F_W	- 0,001 mm	Lower tolerance
L	36 mm	Length
B	50 mm	Width
C	710 N	Load capacity dyn. C
C_0	530 N	Load capacity stat. C0

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website

Mounting dimensions

L_5	24 mm	
L_6	8 mm	Thickness
L_7	5,2 mm	
A_3	12,5 mm	
N_1	5,5 mm	Diameter
K_5	M5	
D_1	37,5 mm	Diameter
Tol D_1	+ 0,2 mm	Upper tolerance
D_2	38 mm	Diameter
Tol D_2	g7	Upper tolerance
J_B	35 mm	
L_8	10 mm	
K_8	NIPD3	Lubrication nipple

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website