
View product details on medias

14.10.2026, 13:31:21 BST

SCHAEFFLER




KFB40-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with flange, sealed, greased, with relubrication facility; corrosion-resistant design possible

Technical information

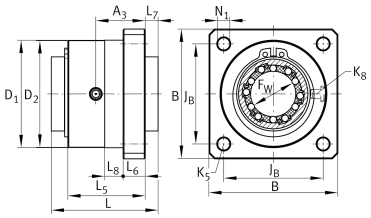

Your current product variant

Size code	40
Seal	PP
Relubrication	AS

Technical data

	6	Ball rows
≈m	1,29 kg	Weight

Main Dimensions & Performance Data

F_W	40 mm	Diameter of ball complement
Tol F_W	+ 0,013 mm	Upper tolerance
Tol F_W	- 0,002 mm	Lower tolerance
L	80 mm	Length
B	100 mm	Width
C	6.000 N	Load capacity dyn. C
C_0	4.400 N	Load capacity stat. C0

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website

Mounting dimensions

L_5	59 mm	
L_6	16 mm	Thickness
L_7	9,2 mm	
A_3	30,3 mm	
N_1	11 mm	Diameter
K_5	M10	
D_1	89,5 mm	Diameter
Tol D_1	+ 0,2 mm	Upper tolerance
D_2	90 mm	Diameter
Tol D_2	g7	Upper tolerance
J_B	78 mm	
L_8	10 mm	
K_8	NIPA1	Lubrication nipple

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website