



# 1.95M ADJUSTABLE PAINT HANGER

MODEL NO: MK80

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Wear protective gloves



Wear protective footwear



Wear eye protection

## 1. SAFETY

- ✓ Only use on firm, level, unobstructed surfaces which are capable of supporting the stand and wheels.
- ✗ **DO NOT** overload.
- ✓ Always load evenly with the centre of gravity of the load as near the centre as possible.
- ✓ Apply the brakes before commencing work.
- ✗ **DO NOT** stand/ride on the stand, or allow others to do so.
- ✓ Replace or repair damaged parts. Use only recommended parts. Unauthorised parts may be dangerous and will invalidate the warranty.
- ☐ **WARNING!** Failure to comply with these instructions may result in loss of load, damage to the rack or other property and/or personal injury.
- ☐ **WARNING!** The warnings, cautions and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood that common sense and caution are factors which cannot be built into this product, but must be applied by the operator.

## 2. INTRODUCTION


Adjustable height from 1.3m to 1.95m. Six hooks with a combined capacity of 75kg for hanging small parts. Suitable for hanging bumpers, bonnets, doors, wings and spoilers. Fitted with four castors, two with brakes for maximum manoeuvrability and safe positioning.

## 3. SPECIFICATION

Model No:.....MK80  
 Max. Capacity: ..... 75kg  
 Maximum Height: ..... 1950mm  
 Minimum Height: ..... 1300mm

## 4. ASSEMBLY

- 4.1. Start assembly by attaching the base of the frame (1 & 3) together with the frame bracket clamp (6).
- 4.2. Attach the 4 wheels (10) to the base of the frame, and lock the brake on the 2 with brakes, before the next step.
- 4.3. Build upwards, by joining the vertical frame parts (2 & 5) with the adjusting pins (9) and set to the desired height.
- 4.4. Complete the frame by attaching the top frame (4) and securing with the frame bracket clamp (6).
- 4.5. Attach the 6 hanging hooks as required (7).
- 4.6. See diagram & parts list on page 2.

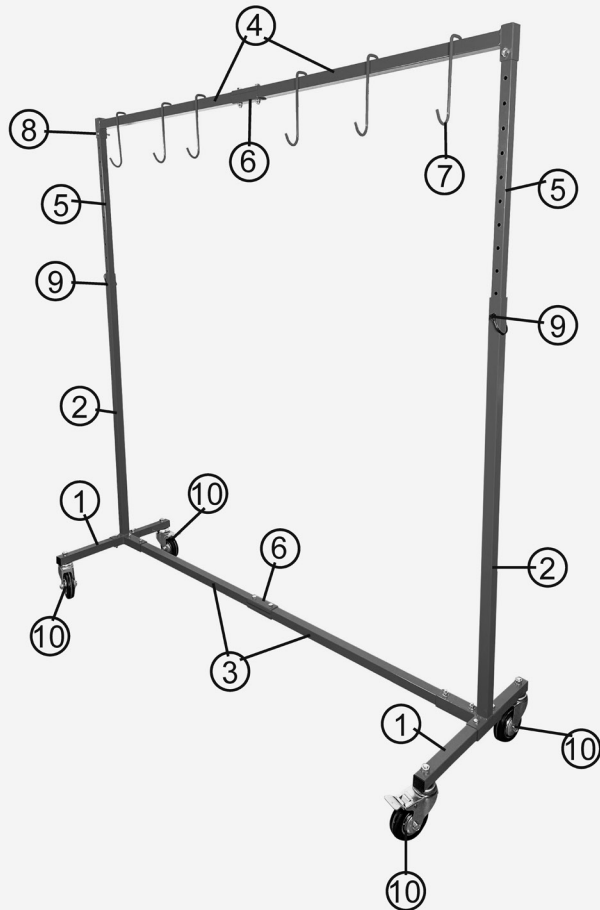

- ① ————— x 2
- ② ————— x 2
- ③ ————— x 2
- ④ ————— x 2
- ⑤ ————— x 2
- ⑥ ————— x 4
- ⑦ ————— x 6
- ⑧ ————— x 14
- ⑨ ————— x 2
- ⑩ ————— x 2      ————— x 2

NO	Description	Quantity
1	Frame Axle	2
2	Main Frame	2
3	Bottom Frame	2
4	Top Frame	2
5	Adjusting Frame	2
6	2- Hole Frame Bracket Clamp	4
7	Hanging Hooks	6
8	Bolt (M8x50)	14
9	Adjusting Pin	2
10	Castors	4



**ENVIRONMENT PROTECTION**

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Important: No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

**Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR**

**01284 757500**

**sales@sealey.co.uk**

**www.sealey.co.uk**