
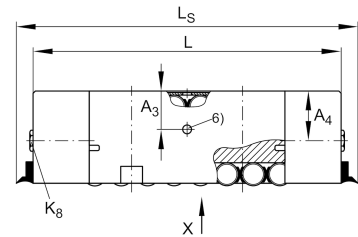


RUS65210

Linear recirculating roller bearing unit

Linear roller bearings with spacer elements
RUS..

Technical information




Your current product variant

Size Code	65210
-----------	-------

Main Dimensions & Performance Data

L tot	232 mm	Total length
L	211.4 mm	
B	76 mm	Width
H	65 mm	Height
C	465,000 N	Basic dynamic load rating
C ₀	732,000 N	Basic static load rating
≈m	7.5 kg	Weight



Mounting dimensions

L 1	133.5 mm	Mounting dimension
J B	62 mm	Mounting dimension
Tol J B	± 0.1 mm	Tolerance
J L	76 mm	
Tol J L	± 0.1 mm	Tolerance
H 1	0.5 mm	
L W	30 mm	
A 3	26 mm	
H 4	55.4 mm	
T 5	22.2 mm	
G 1	M10	Fixing screws top (DIN ISO 4762-12.9)
G1 M A	83 Nm	Tightening torque fixing screws
K 3	M8	Fixing screws below (DIN ISO 4762-12.9)
K3 M A max	41 Nm	Tightening torque fixing screws
D 2	9 mm	
L S	234 mm	
A 4	34 mm	
	M8x1	Lubrication connection DIN3405-A
	6 mm	

Related products

VUS65210	Adjustment gib
UG16260, UGN16260- A, UZ16260, UZN16260- A, UFK8815, UFB10615	Suitable Guide rail