


SAFELOCKER



**COST
REDUCTION**

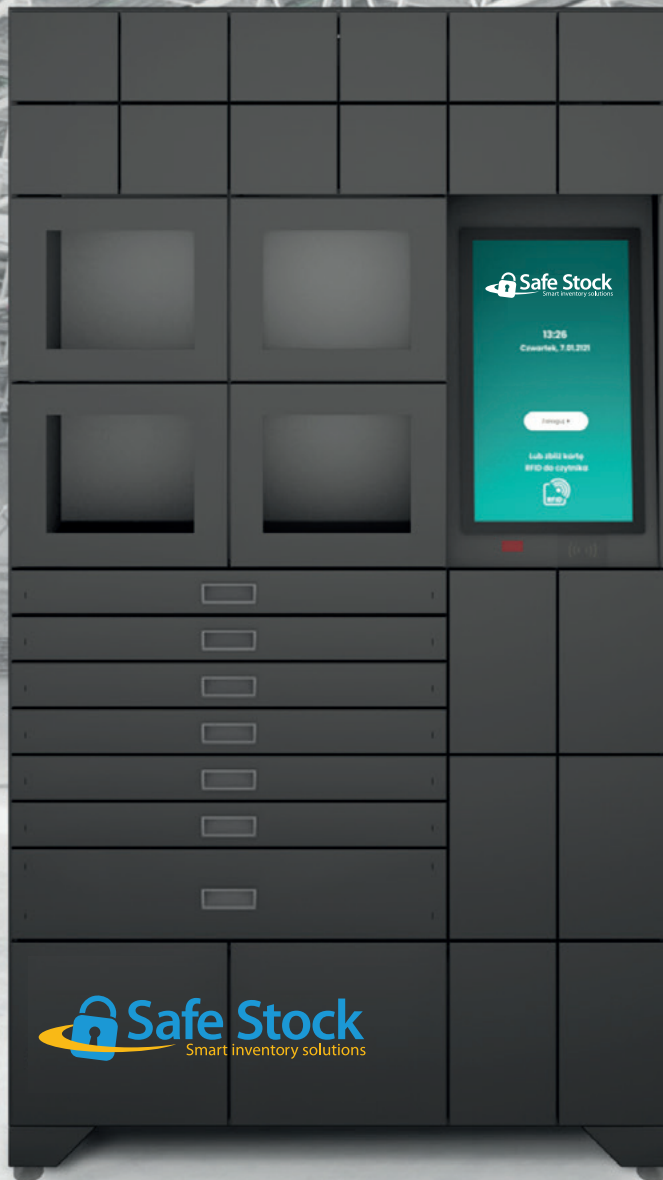

**SAVING
TIME**



CONTROL



REPORTING



24/7 ACCESS

troy Part of the Troy Group

Sales - North
Sandy Purnell
sandy.purnell@safe-stock.co.uk
07867 143697

Sales - South
Tony Goodridge
tony.goodridge@safe-stock.co.uk
07974 201565

 **Safe Stock**
Smart inventory solutions

safe-stock.co.uk

SAFELOCKER

Innovative Multifunctional Vending Machine, adapted to the management of a large number of commodity indexes.



IRlocker is a **modern and self-service** vending machine used for product distribution. The modular design gives the possibility to store **up to 128* unique items of different sizes**. Ease of operation is provided by **21" touch screen** with modern and intuitive interface. **Two product loading options** enable even faster and simpler filling the machine. The IRlocker has a built-in **RFID reader**, barcode and **QR code scanner** which supports the **product return function**.

*1256 - maximum number of lockers in combination with drawers

ADVANTAGES

- ▶ **24/7 access.**
- ▶ **Drop in** the consumption of products by **up to 50%**.
- ▶ Extensive **product returns** function.
- ▶ Power tool **charging capability**.
- ▶ **Large capacity, 128 storage** compartments in the machine or **1256 including drawers**.
- ▶ **2 options** for loading products into the machine.
- ▶ **21" touch screen** with modern and intuitive interface.
- ▶ **Configuration** as required.
- ▶ Built-in **RFID reader**, barcode and **QR code scanner**.
- ▶ **Monitoring of current status** via the IRSystem web application.
- ▶ **Modularity** allows to combine devices into sets.

IR SYSTEM APPLICATION


We offer **proprietary IRSystem software** tailored to the individual needs of the customer for each vending machine, which opens up **unlimited possibilities for remote process management**. IRSystem enables **data migration** and fast communication between the server and machine.

- possibility of **integration** with systems such as ERP, GERP, SAP, etc.
- generating of **automatic reports** and orders
- actual **preview of the inventories** available in the machine
- **management of authorisation** of employee access to the vending machine



TECHNICAL SPECIFICATIONS

Height [mm]	2 000
Width [mm]	1 120
Depth [mm]	600
Voltage [V]	230 VAC - 50 Hz
Pover usage [W]	5/80
Max. load of the locker [kg]	50*
Max. drawer load [kg]	100
Weight [kg]	295
Temp. [°C]	from 5 to 70

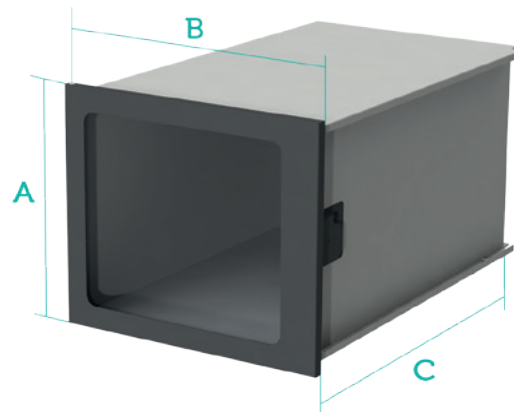

LOCKER CONFIGURATIONS

NUMBER OF LOCKERS	A HEIGHT [MM]	B WIDTH [MM]	C DEPTH [MM]
128	130	50	562
64	130	144	562
32	288	144	562
16	288	328	562
9	602	328	562
5	602	512	562