



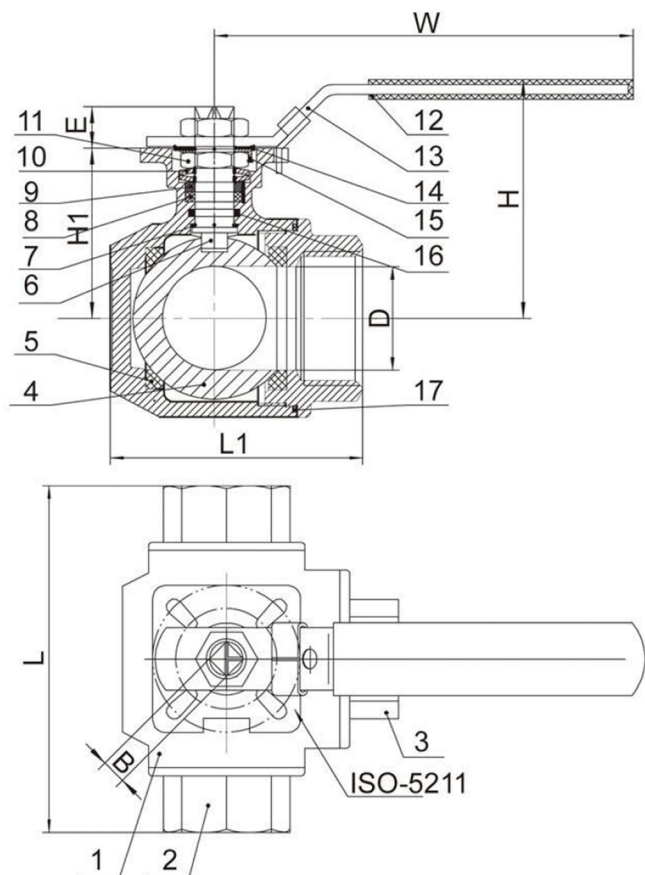

S.NO.	COMPONENT	MATERIAL
1	BODY	CF8/CF8M
2	CAP(1)	CF8/CF8M
3	CAP(2)	CF8/CF8M
4	BALL	CF8/CF8M
5	BALL SEAT	RPTFE
6	STEM	304/316
7	THRUST WASHER	PTFE
8	STEM PACKING	PTFE
9	GLAND NUT	304
10	SPRING WASHER	304
11	NUT	304
12	HANDLE COVER	PVC
13	HANDLE COVER	304/316
14	WASHER	304
15	THRUST WASHER	304
15	O-RING	VITON
17	JOINT GASKET	PTFE

- Pressure rated at 1000 PSI (WOG) - 1/4" -> 2"
- Sizes available from 1/4" up to 2"
- Reduced Port
- Threaded Ends: BSPP (ISO 228-1) NPT (ISO 7.1)
- Investment casting
- Blow-out proof stem
- Inspection Testing: API 598 / EN12266
- Lockable Handle
- PED97/23/EC (CE0035) Approved
- L or T Port options available
- 4 sets for rigid ball supporting

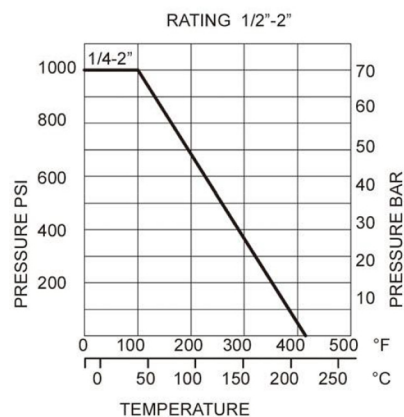

SIZE	PRODUCT CODE		ØD	W	L	L1	H	B	E	ISO 5211	H1	KG EACH
	BSPP	NPT										
1/4	RBVL04	RBVL04N	9	139	79	64	73	9	9	F04/03	42	0.74
3/8	RBVL06	RBVL06N	11	139	79	64	73	9	9	F04/03	42	0.78
1/2	RBVL08	RBVL08N	12.5	139	79	64	73	9	9	F04/03	42	0.82
3/4	RBVL12	RBVL12N	16	139	83	68	80	9	9	F04/03	49	1.18
1	RBVL16	RBVL16N	20	160	104	82	95	11	11	F05/04	59.5	1.70
1-1/4	RBVL20	RBVL20N	25	160	111	90	98	11	11	F05/04	63	2.82
1-1/2	RBVL24	RBVL24N	32	185	126	106	110	14	14	F07/05	73.5	3.96
2	RBVL32	RBVL32N	38	185	147	123	119	14	14	F07/05	82.8	6.78

**** DIMENSIONS SUBJECT TO CHANGE - PLEASE CONTACT US IF CRITICAL ****