
View product details on medias

14.10.2026, 13:36:38 BST

SCHAEFFLER




KFB25-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with flange, sealed, greased, with relubrication facility; corrosion-resistant design possible

Technical information

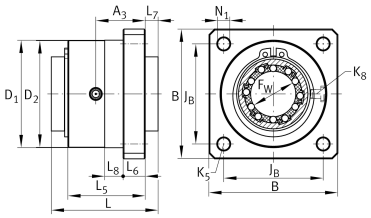

Your current product variant

Size code	25
Seal	PP
Relubrication	AS

Technical data

	6	Ball rows
≈m	0,42 kg	Weight

Main Dimensions & Performance Data

F_W	25 mm	Diameter of ball complement
Tol F_W	+ 0,011 mm	Upper tolerance
Tol F_W	- 0,001 mm	Lower tolerance
L	58 mm	Length
B	70 mm	Width
C	2.800 N	Load capacity dyn. C
C_0	2.200 N	Load capacity stat. C0

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website

Mounting dimensions

L_5	42 mm	
L_6	12 mm	Thickness
L_7	7 mm	
A_3	22 mm	
N_1	6,6 mm	Diameter
K_5	M6	
D_1	57,5 mm	Diameter
Tol D_1	+ 0,2 mm	Upper tolerance
D_2	58 mm	Diameter
Tol D_2	g7	Upper tolerance
J_B	54 mm	
L_8	10 mm	
K_8	NIPA1	Lubrication nipple

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website