View product details on medias

15.10.2026, 13:33:06 BST

SCHAEFFLER



LUCF16D-2LS

Linear ball bearing and housing unit

Linear bearing unit, heavy duty range, self-aligning, open design, seals on both sides

Technical information



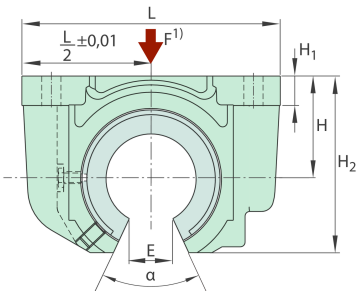



Your current product variant

Size code	16
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s2	Maximum Acceleration
≈m	65 g	Weight

Mounting dimensions

A_1	22 mm	Length
H	22 mm	Center height
J_1	26 mm	
J	40 mm	
E	10,4 mm	Width of cutout
L	56 mm	
J_2	46 mm	
A	34,5 mm	Length
α	78 °	Angle

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website

Main Dimensions & Performance Data

N_2	5,3 mm	Bore diameter
N	4,3 mm	Bore diameter
H_2	35 mm	Height
D_a	26 mm	Bore diameter
F_W	16 mm	Bore diameter
C	36 mm	Length
C_{max}	1.320 N	Load capacity dyn.
C_{min}	670 N	Load capacity dyn.
$C_{0\,min}$	480 N	Load capacity stat.
$C_{0\,max}$	1.120 N	Load capacity stat.

Dimensions

H_1	7 mm	Height of Carriage

The data sheet only contains an overview of the technical data of the selected product. Please refer to the additional documentation for this product. For further information, please use the following link on our website